

MAKE IT YOUR OWN

BUILD | ATTACH | SET | EXPLORE

Introducing the next phase in roof rack evolution, the ARB BASE Rack.

Ultra sleek, boasting a super low mounting profile and lightweight design, the BASE Rack provides unmatched simplicity, flexibility and personalisation in your roof rack set-up.

Setting a new benchmark in strength and integration, the BASE Rack incorporates a revolutionary dovetail mounting system that makes attaching and removing loads and accessories easier, faster and more secure.

With six sizes to suit a huge range of vehicle applications and an ever-growing array of complementary accessories, the BASE Rack represents your all-in-one solution and the last rack you'll ever need.




FEATURES

- · Ultra sleek, low-profile design
- Fully welded construction for superior strength and rigidity
- Textured black powder-coat finish
- Lightweight, cast aluminium cross beam formation
- Unique new dovetail mounting extrusion offers greater versatility, flexibility and speed in accessory placement and attachment
- Dovetail design means less dirt entrapment (easy cleaning)
- Side-mounted fixing points allow for greater use of rack beams for cargo loading
- Purpose-designed range of quick-release dovetail accessories requiring few or no tools
- Removable end caps allow access to channel for installing hidden electrical cables for roof lighting and solar
- Compatible with existing T-slot accessories*

*Additional adaptors sold separately





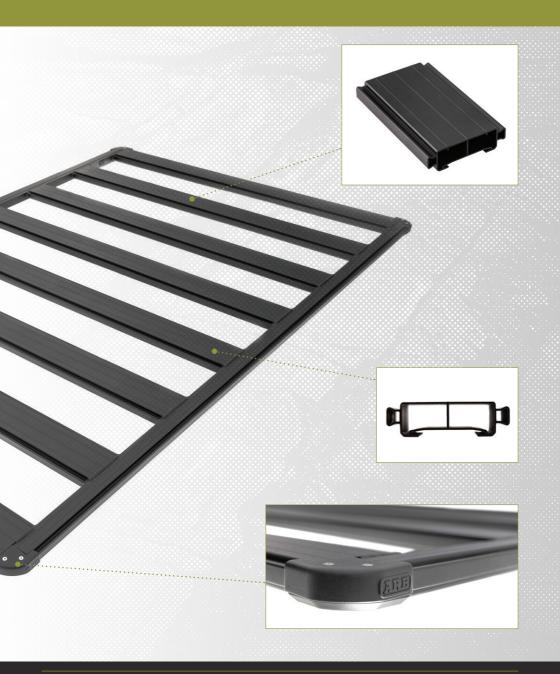

05

ARB BASE RACK

STRENGTH MEETS STYLE

Made from extruded aluminium, the BASE Rack's clever design mounts close to the roof line, doesn't require a supporting sub frame and exerts no flex under load.

Each beam is constructed from a single seamless box piece of aluminium with internal bracing for added strength and no screws or rivets. The BASE Rack is fully welded, providing a strength and load rating similar to a traditional steel rack at a fraction of the weight. Unique in design, the BASE Rack runs its beams across the width of the vehicle, resulting in maximum strength and rigidity. This makes it easier to pack and carry almost anything.

Fitted to a range of low-profile blade mounts, the BASE Rack provides improved access into low clearance areas, all the while looking sleek on the roof of your pride and joy.

THE RANGE

The BASE Rack is available in a number of sizes to complement the vast range of 4WDs and vans on the market.

Sizes/Dimensions:

1,255mm x 1,155mm - 12.7kg approximately Best suited to dual-cab roof Part no. 1770060

1,255mm x 1,285mm - 14.3kg approximately Best suited to dual-cab roof, Sportlid and HardLid Part no. 1770070

1,545mm x 1,285mm - 16.6kg approximately Best suited to vehicle roof, short canopy Part no. 1770020

1,545mm x 1,445mm - 18.5kg approximately Best suited to vans and larger cab wagon Part no. 1770080

1,835mm x 1,155mm - 17.7kg approximately Best suited to narrow canopy Part no. 1770010 **1,835mm x 1,285mm - 19.9kg approximately** Best suited to wider canopy or smaller wagon Part no. 1770030

1,835mm x 1,445mm - 21.5kg approximately Best suited to vans and larger cab wagon Part no. 1770090

2,125mm x 1,285mm - 22.8kg approximately Best suited to larger cab wagon Part no. 1770040

2,125mm x 1,445mm - 24.5kg approximately Best suited to vans and larger cab wagon Part no. 1770100

2,415mm x 1,445mm - 30.3kg approximately Best suited to vans Part no. 1770120

2,705mm x 1,445mm - 33.4kg approximately Best suited to vans Part no. 1770130

2,995mm x 1,445mm - 36.5kg approximately Best suited to vans Part no. 1770140



APPLICATIONS



ARB's BASE Rack can be applied on a range of different vehicles and a range of different areas, giving you the customisation to suit your vehicle's needs.

ARB offers BASE Rack application on: Vehicle's roof ARB Canopies HardLid Sportlid Vans Bed Rack



ARB BASE RACK





(ARB) BASE RACK

BASE RACK FOR VANS



ARB has extended its BASE Rack range to the ever-growing van vehicle segment. Leveraging almost 50 years of experience in 4×4 accessories manufacturing, ARB is developing products dedicated specifically to vans. With a wide range of touring and camping products already available, van owners will be able to take their lives to the next level, with a little help from ARB.



ARB BASE RACK

TWO-PIECE MODULAR SOLUTION

Vans require larger and longer racks to suit the extended roof platform; therefore, ARB has now introduced a new two-piece modular design that is available in three new rack sizes.

The two-piece modular design suits a van's larger roof platform, assembles quickly and is easier to store and freight while retaining the fully welded BASE Rack beams and all the current BASE Rack features.

When a two-piece rack is specified for an application, the fitting kit has also been designed as a two-piece format.








MAKE IT YOUR OWN

The BASE Rack takes accessories and cargo loading to a whole new level of simplicity, speed and personalisation. With a choice of sizes, accessories and attachments, you can truly Make It Your Own.

By incorporating a dovetail extrusion around both the full perimeter and along each edge of the internal beams, the BASE Rack provides endless mounting and attachment options. Adding, removing and repositioning accessories and roof loads is quick and easy with the BASE Rack's dovetail system, making it easier to install and remove individual items without disturbing the whole load. Plus, unlike traditional roof rack channels, the BASE Rack dovetail extrusion won't collect dust and debris.

Each BASE Rack accessory or fixture attaches to the rack with a simple clamp mount, including larger hardware such as Hi-Lift[™] Jack mounts, rollers, recovery boards and even a BASE Rack custom light bar.



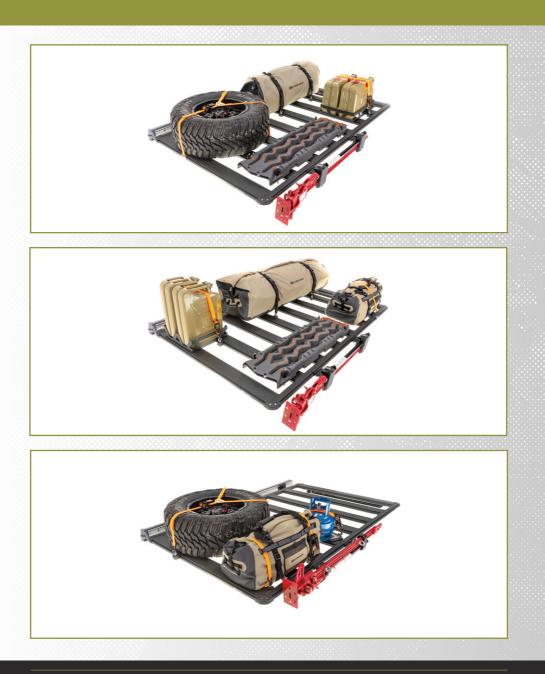

(ARB) BASE RACK



GUARD RAIL SYSTEMS

The BASE Rack is sold standard as a low-profile platform rack and can easily be transformed into a touring or trade rack by simply installing the rail system that best suits your needs.

The optional rails attach quickly and easily to the dovetail extrusion around the rack's perimeter. You can have a full guard rail system on or off in just a few minutes.

Full Rails

Designed for the tourer. The rails running around the perimeter of the rack act as a load block, helping to prevent larger items such as swags and tents from shifting when loading and unloading as well as during transit.

3/4 Rails

A cross between full and trade rails, 3/4 rails, along with an optional roller kit, assist with easy rear loading of large and awkward items whilst still providing load security at the front of the rack. Also designed for rear-folding rooftop tents, subject to tent width.

1/4 Rails

Perfect for campers, this style of rail is great for rooftop tents whilst still providing ample storage and load security at the front of the rack.

Trade Rails

The tradie option. Great for loading long items such as timber and ladders with an optional roller kit to help glide long or awkward items onto the rack. The side rails prevent items from slipping or rolling off the rack during loading and allow you to fill the rack right up to the edge.




(ARB) BASE RACK







SORIES



AWNING BRACKET



Mount your ARB awning securely. Available in classic and quick-release versions, the awning bracket allows quick fitment of your awning, meaning you spend less time at home packing and prepping and more time at your destination enjoying the great outdoors.



- · Allows fitment of ARB's awning range
- Easy to attach to the BASE Rack simply secure onto the dovetail track on the rack
- Can attach to the dovetail track at any point on the rack
- Made from strong powder-coated steel

To use:

Simply secure the awning bracket with provided fasteners to the dovetail track on the BASE Rack. Secure the ARB awning to the bracket and it is ready to use.

QUICK-RELEASE AWNING BRACKET






- · Allows fitment of ARB's awning range
- Can attach to the dovetail track on the perimeter of the rack
- Quick-release bracket allows your awning to be removed in no time
- Made from strong powder-coated steel


To use:

ARB TOURING

Simply attach fixed mount brackets to the dovetail on the perimeter of the BASE Rack. Attach quick-release mount bracket to the ARB awning and secure to the fixed mount bracket on the rack with provided fasteners. To release, loosen fasteners, then slide and lift.



HEAVY-DUTY AWNING BRACKET

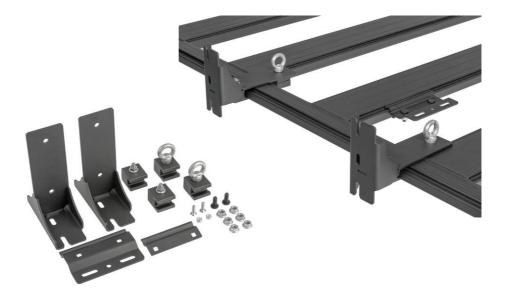

Got an awning and need brackets to support it? The heavy-duty awning mount means you can securely attach an awning weighing up to 25 kilograms to the BASE Rack.


- Designed to suit 270-degree awnings
- · Integrated eye nut tie-down points
- Quick-release slots for easy install and removal
- · High and low mount position
- Attaches to the sides and cross beams of the ARB BASE Rack
- Brackets are made from strong powder-coated steel

NARROW BRIDGE PLATE

- · Provides a strong, versatile attachment point
- · Ideal for mounting rooftop tents
- Can be used as a clamped pair or mounted individually

Four brackets per kit, includes fasteners

Part no. 1780420



WIDE BRIDGE PLATE

- Suitable for mounting aerials, sand flags, some beacons, RotopaX[™] and round driving lights
- Two brackets per kit, includes fasteners for clamp mounting
- Can be used as a clamped pair or individually mounted on alloy blocks
- Made from strong powder-coated steel
 Part no. 1780430









HORIZONTAL WIDE MOUNT

- Suitable for items up to six kilograms (13 pounds) per bracket
- Brackets made from strong
 powder-coated steel
- Provides a strong, versatile horizontal attachment point to BASE Rack
- Two brackets per kit, includes fasteners for mounting to rack

Part no. 1780450





HORIZONTAL NARROW MOUNT





- Can attach to the dovetail track
 on any location on the rack
- Suitable for mounting small items up to three kilograms (6.6 pounds) per bracket
- Brackets are made from strong
 powder-coated steel
- Two brackets per kit, includes fasteners for mounting to rack

VERTICAL NARROW MOUNT AND VERTICAL WIDE MOUNT



- Provides a strong, versatile vertical attachment point to your BASE Rack
- The narrow mount is suitable for mounting small items up to three kilograms (6.6 pounds) per bracket
- The wide mount is suitable for mounting up to six kilograms (13 pounds) per bracket
- Two brackets per kit, includes fasteners for mounting to rack

Narrow mount part no. 1780460 Wide mount part no. 1780470





(ARB) BASE RACK

ROLLER KIT





Loading long pieces of timber and other heavy items can be tricky when you're alone but adding a roller to the end of your BASE Rack will alleviate this. The roller helps your equipment to glide onto the rack ready for you to secure and get on your way.



- Allows easy loading onto your BASE Rack
- Can attach to the dovetail track anywhere on the perimeter
- Made from powder-coated aluminium
- Makes long, heavy items easy to load safely onto the roof rack
- Full-width, low-profile roller

Available in two sizes:

1,025mm Part no. 1780360

1,185mm Part no. 1780365

To use:

Simply bolt the brackets to the dovetail track and attach roller.

SHOVEL HOLDER



With its unique mounting positions, the ARB BASE Rack Shovel Holder can be fitted to all BASE Rack configurations allowing for various shovel sizes and configuration of other BASE Rack accessories.

- Quick-release retaining system ensures high clamping force and ease of use
- Custom-designed retaining system is lockable and UV stable for the harshest environments
- Flip-open design is suitable for both shovels and spades
- · Four mounting options for personal set-up
- Mounting brackets made from powder-coated stainless steel
- Retaining knob non-removable, cannot be lost
- Suitable for handle diameters between 32 and 42 millimetres (1.25 and 1.625 inches)





To use:

Simply bolt the brackets to the dovetail track in the orientation that best suits your needs. Secure your shovel via the quick-release retaining system.



ROOF RACK LIGHT BAR

- Unique reflector design to provide optimum distance and width for highway driving
- Reflector design limits light being reflected off vehicle bonnet and bar work
- Combo beam technology provides excellent mid- to long-range spread as well as distance down the road
- Virtually indestructible polycarbonate lens
- Protected against radio frequency (RFI) and electromagnetic (EMC) interference
- Two-pin, over-moulded, waterproof plug
- Suitable for use with ARB driving light loom 3500810 and 3500820
- R10, CE and RoHS certified
- Three-year warranty



Light Bar Lens Cover also available:

- Contains two covers x 22.8 centimetres (9.0 inches)
- Virtually indestructible polycarbonate cover
- Available in clear, solid black and amber

Input	12V to 48V
Power	130W
Current Draw	9.2A @ 14.4V
Output - Raw	9,279 lumens
Output - Effective	8,552 lumens
Lux @ M (Single Light)	1 lux @ 728m
Spread	Horizontal 8° & Vertical 6°
Input Cable Length	330mm (male terminal)
Operating Temp	-40°C to +65°C (-40°F to +149°F)
Colour Temp	5,500-6,000K
Runtime	50,000hrs
Weight	3.07kg
Connector	2-pin, over-moulded, waterproof plug
Dimensions	954mm (37.55") (W) x 67mm (2.63") (L) x 34mm (1.33") (H)
Certifications	R10, CE & RoHS

Kit includes:

1 × 36-inch light bar
2 x Bracket for below rack mounting
2 x Bracket for front rack mounting
1 x Bracket mounting hardware



AUXILIARY LIGHT

Light up the night with this compact and capable auxiliary light that attaches easily to any ARB BASE Rack. The 2.8-inch light is great for lighting up your campsite or workspace.



Part no. 1780520 Part no. 1780550 (Tri-colour)

SpecificationsAux LightTri-col Aux LightInput9V to 36V9V to 36VPower20W30W Dual ColourCurrent Draw1.67A @ 12V0.9A (white), 0.85A (warm), 0.9A (amber) @ 13.2VLED2 × 10W OSRAM@11W ~ 12WOutput1,100 lumens- Raw (lumens): 1,800 (white), 1,600 (warm), 1,000 (amber) - Effective (lumens): 1,200 (white), 1,000 (warm), 600 (amber)Colour Temp5,000K (white)5,700K (white), 3,000K (warm), 1,500K (amber)ConnectorWaterproof DT connectorsShood 120°Operating Temp-40°C to +100°C with thermal management-30°C to +80°C (-22°F to +176°F) with thermal managementRuntime50,000hrs50,000hrsWeather RatingIP69KIP69K	Specifications	AuxLight	Tri col Aux Light	
Power20W30W Dual ColourCurrent Draw1.67A @ 12V0.9A (white), 0.85A (warm), 0.9A (amber) @ 13.2VLED2 × 10W OSRAM@11W ~ 12WOutput1,100 lumens- Raw (lumens): 1,800 (white), 1,600 (warm), 1,000 (amber) - Effective (lumens): 1,200 (white), 1,000 (warm), 600 (amber)Colour Temp5,000K (white)5,700K (white), 3,000K (warm), 1,500K (amber)ConnectorWaterproof DT connectorsStreptood 120°SpreadFlood 120°Flood 120°Operating remp-40°C to +100°C (-40°F to +212°F) with thermal management-30°C to +80°C (-22°F to +176°F)Runtime50,000hrs50,000hrs	specifications	Aux Light	In-col Aux Light	
Current Draw1.67A @ 12V0.9A (white), 0.85A (warm), 0.9A (amber) @ 13.2VLED2 × 10W OSRAM@11W ~ 12WOutput1,100 lumens- Raw (lumens): 1,800 (white), 1,600 (warm), 1,000 (amber) - Effective (lumens): 1,200 (white), 1,000 (warm), 600 (amber)Colour Temp5,000K (white)5,700K (white), 3,000K (warm), 1,500K (amber)ConnectorWaterproof DT connectorsWaterproof 2-pin DT connectorsSpreadFlood 120°Flood 120°Operating Temp-40°C to +100°C (-40°F to +212°F) with thermal management-30°C to +80°C (-22°F to +176°F)Runtime50,000hrs50,000hrs	Input	9V to 36V	9V to 36V	
0.9A (amber) @ 13.2VLED2 × 10W OSRAM@11W ~ 12WOutput1,100 lumens- Raw (lumens): 1,800 (white), 1,600 (warm), 1,000 (amber) - Effective (lumens): 1,200 (white), 1,000 (warm), 600 (amber)Colour Temp5,000K (white) 5,700K (white), 3,000K (warm), 1,500K (amber)ConnectorWaterproof DT connectorsSpreadFlood 120°Operating Temp-40°C to +100°C with thermal managementRuntime50,000hrs50,000hrs50,000hrs	Power	20W	30W Dual Colour	
Output1,100 lumens- Raw (lumens): 1,800 (white), 1,600 (warm), 1,000 (amber) - Effective (lumens): 1,200 (white), 1,000 (warm), 600 (amber)Colour Temp5,000K (white)5,700K (white), 3,000K (warm), 1,500K (amber)ConnectorWaterproof DT connectorsWaterproof 2-pin DT connectorsSpreadFlood 120°Flood 120°Operating Temp-40°C to +100°C with thermal management-30°C to +80°C (-22°F to +176°F)Runtime50,000hrs50,000hrs	Current Draw	1.67A @ 12V		
1,800 (white), 1,600 (warm), 1,000 (amber) - Effective (lumens): 1,200 (white), 1,000 (warm), 600 (amber)Colour Temp5,000K (white) 5,700K (white), 3,000K (warm), 1,500K (amber)ConnectorWaterproof DT connectorsConnectorWaterproof DT connectorsSpreadFlood 120°Operating Temp-40°C to +100°C (-40°F to +212°F) with thermal managementRuntime50,000hrs50,000hrs50,000hrs	LED	2 × 10W OSRAM®	11W ~ 12W	
3,000K (warm), 1,500K (amber) Connector Waterproof DT connectors Waterproof 2-pin DT connectors Spread Flood 120° Flood 120° Operating Temp -40°C to +100°C (-40°F to +212°F) with thermal management -30°C to +80°C (-22°F to +176°F) Runtime 50,000hrs 50,000hrs	Output	1,100 lumens	1,800 (white), 1,600 (warm), 1,000 (amber) - Effective (lumens): 1,200 (white), 1,000 (warm),	
connectorsconnectorsSpreadFlood 120°Flood 120°Operating Temp-40°C to +100°C (-40°F to +212°F) with thermal management-30°C to +80°C (-22°F to +176°F)Runtime50,000hrs50,000hrs	Colour Temp	5,000K (white)	3,000K (warm),	
Operating Temp -40°C to +100°C (-40°F to +212°F) with thermal management -30°C to +80°C (-22°F to +176°F) Runtime 50,000hrs 50,000hrs	Connector			
Temp (-40°F to +212°F) (-22°F to +176°F) with thermal management Runtime 50,000hrs 50,000hrs	Spread	Flood 120°	Flood 120°	
		(-40°F to +212°F) with thermal		
Weather Rating IP69K IP69K	Runtime	50,000hrs	50,000hrs	
	Weather Rating	IP69K	IP69K	

LIGHT BAR Dovetail Mount

- Mount to the dovetail track at any location
- Made from strong powder-coated steel
- Suitable for mounting small items up to 3.5 kilograms (7.7 pounds) per pair
- Includes fasteners for mounting to rack

Part no. 1780480

LIGHT BAR UNDER MOUNT

- Attaches to bottom of BASE Rack
- Suitable for mounting small items up to 3.5 kilograms (7.7 pounds) per pair
- Suitable for single-bolt, end-mount light bar and work lights
- Includes fasteners for mounting to rack



(ARB) BASE RACK

NACHO QUATRO BASE RACK LIGHT ADAPTOR KIT

The size of the NACHO Quatro light enables mounting options on vehicles that have previously not been available with our existing range. NACHO sets themselves apart by putting control back into your hands and allowing you to mount your lights where you want. Now with ARB's NACHO Quatro BASE Rack Light Bracket, you can mount your NACHO Quatro Driving Lights seamlessly across your BASE Rack.

- Can attach to the dovetail track at any point on the rack
- Made from strong, corrosionresistant steel






Part no. 1780860

Kit Includes:

- 2 x Quatro LED Driving Lights
- 2 x Bracket Kits with Hardware
- 2 x Amber and smoke lens covers

Specifications	Flood	Spot	Combo	SAE White	SAE Amber
Peak Candela	48,000	212,000	124,000	112,000	80,200
Effective Lumens	8,166	10,820	10,486	9,176	4,360
Raw Lumens	14,400	14,400	14,400	12,040	5,600
Watts	120W	120W	120W	124W	124W
Current Draw	8.58A @ 14.4V	8.58A @ 14.4V	8.58A @ 14.4V	9A @ 14.4V	9A @ 14.4V
Input Voltage	9VDC	9VDC	10-16VDC	10-16VDC	10-16VDC
Product Size	4IN	4IN	4IN	4IN	4IN
Weight	1.2lbs each	1.2lbs each	1.2lbs each	1.2lbs each	1.2lbs each

RECOVERY TRACK HOLDER

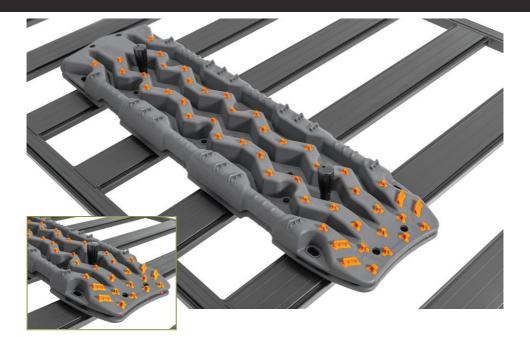

When you're stuck in the sand, you want to be able to access your recovery tracks quickly so you can get on with your adventure.

- Allows easy fitment of recovery tracks onto the BASE Rack
- Can attach to the dovetail track at any point on the rack
- · Made from strong, corrosion-resistant steel
- To be used with track manufacturer's mounting hardware
- Suitable for use with MaxTrax and ARB TRED Pros (product-specific mounting hardware sold separately)

To use:

Simply bolt the four brackets with manufacturer's hardware to the dovetail track on the BASE Rack and follow manufacturer's direction to secure tracks.



ARB BASE RACK

HI-LIFT JACK HOLDER

An off road jack is a 4WDer's best friend. When you're out on the tracks, you want easy access to your jack and the Hi-Lift[™] Jack holder ensures your jack is always at hand. Available in both classic for simple jack attachment and premium for quick release and added security.

- Allows easy fitment of Hi-Lift[™] Jack onto the BASE Rack
- Can attach to the dovetail track anywhere on the perimeter
- · Made from strong, corrosion-resistant steel
- · Includes rubber handle keeper

To use:

Simply bolt the mount bracket to the dovetail track. Secure the jack with the supplied forged steel eye nuts. To release the jack, remove the forged steel eye nuts.

Part no. 1780290

HI-LIFT JACK HOLDER (PREMIUM)

- Allows easy fitment of a Hi-Lift[™] Jack to your BASE Rack
- Can attach to the dovetail track anywhere
 on the perimeter
- Made from strong powder-coated steel
- · Padlock provision for added security
- Quick-release loading and unloading of jack

To use:

Simply bolt the two brackets to the dovetail track. Place the jack in the brace and clip closed.

Part no. 1780280









ARB BASE RACK

GAS BOTTLE HOLDER




Keeping a gas bottle safe and secure is a must when travelling. Attaching and removing your gas bottle is a breeze with the gas bottle holder. It can be secured to an individual beam or span between beams.

- Allows easy fitment of a gas bottle to your BASE Rack
- Suits gas bottles between two kilograms and nine kilograms
- Secures to an individual beam or spans between beams
- Eye bolts and strap included to secure gas bottle
- Durable baseplate with adjustable stainless steel locking bracket
- Solid aluminium clamps and forged steel eye nuts
- Can attach to the dovetail track at any point on the rack
- Made from strong powder-coated steel



To use:

Simply attach the gas bottle holder to the dovetail track using the two forged steel eye nuts. Secure the gas bottle using the ratchet strap supplied by attaching to each eye nut.



BASE RACK WIRING



With the ARB BASE Rack's innovative development, our engineers have created a sleek wiring solution for your accessories. You can easily route your wiring from inside the vehicle through the roof, whether it is a vehicle or canopy.

- Two wiring kit options: the first comes prewired with six sealed wires (three circuit) already installed and the second has for six wires, allowing you to customise the wiring according to your needs
- Sealed wiring solution for passing wires through a vehicle roof
- Seamless integration with ARB BASE Rack



- Exit grommets to fit standard 10-millimetre and 13-millimetre OD conduit sizes
- · High-quality automotive wire to JASO standards
- · Free from liquid adhesives
- Disconnection kit to reseal roof exit points when rack is removed

BASE RACK ROOFTOP TENT MOUNT




Want to mount your rooftop tent to your ARB BASE Rack? BASE Rack engineers have designed a specific rooftop tent mount kit, which provides a strong, low-profile attachment point for your rooftop tent to your ARB BASE Rack.

- Double bolt system provides additional clamp force and is retained in place when tent is removed
- · Can be used for mounting other accessories
- · Made from strong, powder coated aluminium
- · Set of four per pack, includes fasteners
- Rated to max 150kg (330lbs) tents using 4 clamps
- Individual clamp max rating is 40kg (88lbs)



(ARB) BASE RACK

JERRY CAN HOLDER DOUBLE HORIZONTAL

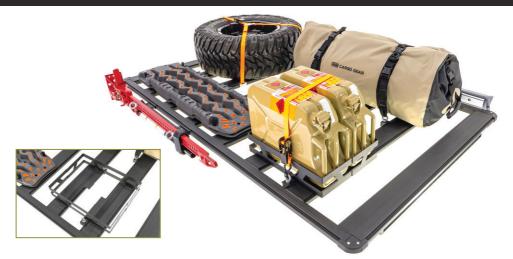

It is often essential to carry extra fuel or water on an off road trip. Rest assured you can always be prepared with four jerry can holder sizes, perfect to suit your individual needs.



- Allows easy fitment of two jerry cans to your BASE Rack
- · Mounts horizontally
- · Secures to two beams
- Solid aluminium clamps with forged steel eye nuts, strap included
- Can attach to the dovetail track at any point on the rack
- Holder made from strong powder-coated steel

To use:

Simply attach the jerry can holder to the dovetail track using the two forged steel eye nuts. Secure the jerry can using the ratchet strap supplied by attaching to each eye nut.

JERRY CAN HOLDER DOUBLE VERTICAL





- Allows easy fitment of two jerry cans to your BASE Rack
- · Mounts vertically
- Provision for water tap
- Secures to two beams
- Solid aluminium clamps with forged steel eye nuts, strap included
- Can attach to the dovetail track at any point on the rack
- Holder made from strong powder-coated steel

To use:

Simply attach the jerry can holder to the dovetail track using the two forged steel eye nuts. Secure the jerry can using the ratchet strap supplied by attaching to each eye nut.



JERRY CAN HOLDER SINGLE HORIZONTAL





- Allows easy fitment of a jerry can to your BASE Rack
- Mounted horizontally
- Secures to individual beam or spans between beams
- Solid aluminium clamps with forged steel eye nuts, strap included
- · Powder-coated steel support plate
- Can attach to the dovetail track at any point
 on the rack
- Holder made from strong powder-coated steel

To use:

Simply attach the jerry can holder to the dovetail track using the two forged steel eye nuts. Secure the jerry can using the ratchet strap supplied by attaching to each eye nut.



JERRY CAN HOLDER SINGLE VERTICAL






- Allows easy fitment of a jerry can to your BASE Rack
- Mounted vertically
- · Provision for water tap
- Secures to an individual beam or spans between beams
- Solid aluminium clamps with forged steel eye nuts, strap included
- Powder-coated steel support plate
- Can attach to the dovetail track at any point
 on the rack
- Holder made from strong powder-coated steel
- · Accommodates 10-litre and 20-litre jerry cans



To use:

Simply attach the jerry can holder to the dovetail track using the two forged steel eye nuts. Secure the jerry can using the ratchet strap supplied by attaching to each eye nut.



RATCHET STRAP (PAIR)





Ensure all your gear is safe and secure on your BASE Rack. These ratchet straps are easy to attach to the rack and will give you peace of mind when carrying bulky items.



- Three-metre by 25-millimetre polyester webbing
- For use with BASE Rack without the need for additional tie-down points
- 200-kilogram lashing capacity to AS/NZS 4380:2001
- · Set of two per pack
- Supplied with carry bag

To use:

Simply hook strap ends onto the BASE Rack dovetail, feed through ratchet and tighten.

SPARE WHEEL Y-STRAP

Secure your spare wheel on your BASE Rack with ease, ready to tackle your next adventure. These spare wheel straps are easy to use and will secure your load in no time at all.

- 25-millimetre polyester webbing
- For use with BASE Rack without the need for additional tie-down points
- 150-kilogram lashing capacity to AS/NZS 4380:2001
- · Adjustable one-metre straps suit most tyre sizes
- · Supplied with carry bag

Part no. 1780380



SPARE WHEEL Y-STRAP WITH SNAP HOOKS

(EYE BOLT TIE-DOWN NOT INCLUDED)

- · Suitable for both wheel assemblies or for tyre carcass only
- 32mm ratchet with 32mm & 25mm polyester webbing
- Back up tether strap keeps wheel and tyre positively retained
- Snap lock hook ends provide convenient install and always stays retained
- Adjustable one metre strap designed to suit most tyre sizes
- 500kg/500daN lashing capacity complies to AS/NZS4380:2001 and EN 12195-2

Part no. 1780385



ARB

ARB BASE RACK

EYE BOLT TIE-DOWN (SET OF FOUR)



Secure your gear quickly and safely. From items such as timber and ladders to swags and camping gear, these eye bolt tie-downs are built tough to handle any load and terrain.

- · Provides a lashing point for ratchet straps
- Designed to stay securely on the BASE Rack when not in use
- Can attach to the dovetail track at any point on the rack
- Made from strong powder-coated aluminium
- Forged steel eye nuts
- · Set of four per pack

To use:

Simply attach the tie-down point to the dovetail track on the BASE Rack and tighten. Secure the ratchet straps to each tie-down and pull tight to secure load.









- Strong attachment point
- Compatible with other BASE Rack accessories
- · Set of four per pack
- Made from strong powder-coated aluminium

SPRING-LOADED TIE-DOWN (PAIR)



To use:

Simply place over dovetail track flat side down. Rotate 180°. Hook lashing through ring and tighten. Remove from BASE Rack when not in use. Quick-attach spring-loaded tie-downs are easy to use with a simple one-handed operation. Great for one-off needs and quick loading and unloading.

- · Quick attachment and release
- · Provides a lashing point for ratchet straps
- · Easy to attach to the roof rack
- Designed to be taken off the rack when not in use by a simple half turn
- Can attach to the dovetail track at any point on the rack
- Made from strong stainless steel
- · Set of two per pack




Part no. 1780210

WIND DEFLECTOR

No longer will there be the fear of additional cabin noise when fitting a roof rack. ARB's engineers have designed an undersidemounting wind deflector, ensuring a quiet and enjoyable driving experience.



- 1.6-millimetre press-formed aluminium
- Press-form shape provides rigidity and strength and aids noise reduction (in technical terms, it reduces vortex shedding effects)
- Durable powder-coat finish
- Vehicle specific
- Pre-cut slots to aid fitment of front-mounted roof rack light bar
- Significantly reduces wind noise associated with roof racks (almost eliminates it on most vehicles)



T-SLOT ADAPTOR (SINGLE OR PAIR)



For the active outdoor adventurer. For use with your existing T-slot compatible accessories. From your bike carrier to your kayak holder, the T-slot adaptor bracket ensures you can easily attach anything to the BASE Rack.



- Allows fitment of accessories from a range of roof rack manufacturers
- Uses a standard T-slot channel to accept T-slot mounted accessories
- Can attach to the dovetail track at any point
 on the rack
- · Made from strong powder-coated aluminium
- Available as single or pair

To use:

Simply attach the T-slot adaptor to the dovetail track on the BASE Rack. Attach the accessory to the T-slot adaptor as per manufacturer's instructions.

Single part no. 1780220 Pair part no. 1780230



